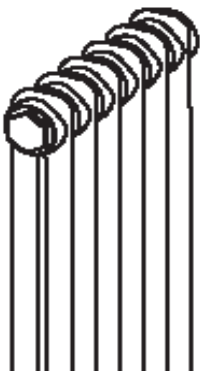
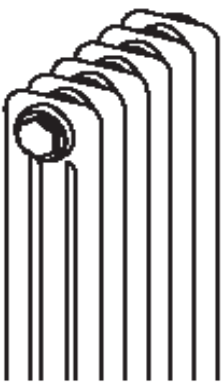
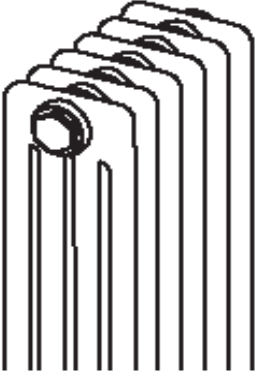
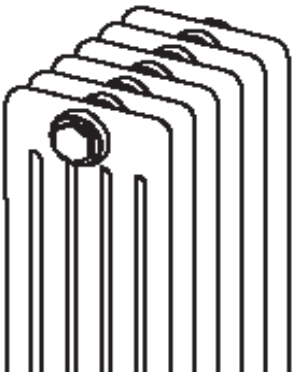



Трубчатые радиаторы

Модель		H, мм	N, мм	Ф ДТ 50K 75/65/20°C	Exp., п	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро
2-трубчатый, T=65 мм									
	2019	190	120	15	1,23	0,33	66	2970	13,99
	2026	260	190	20	1,25	0,42	66	2970	14,38
	2030	300	230	24	1,26	0,47	66	2970	14,63
	2035	350	280	28	1,31	0,53	66	2970	14,92
	2040	400	330	31	1,31	0,59	66	2970	15,05
	2045	450	380	35	1,31	0,65	66	2970	15,44
	2050	500	430	39	1,31	0,71	66	2970	15,86
	2055	550	480	42	1,31	0,77	66	2970	16,13
	2057	570	500	42	1,31	0,80	66	2970	16,58
	2060	600	530	46	1,31	0,83	66	2970	16,61
	2075	750	680	57	1,31	1,02	66	2970	17,29
	2090	900	830	67	1,31	1,20	66	2970	18,41
	2100	1000	930	74	1,32	1,32	66	2970	19,27
	2110	1100	1030	81	1,32	1,44	66	2970	20,03
	2120	1200	1130	88	1,32	1,56	66	2970	21,38
	2150	1500	1430	109	1,32	1,93	66	2970	27,34
	2180	1800	1730	130	1,32	2,29	66	2970	32,32
	2200	2000	1930	144	1,32	2,53	66	2970	36,17
	2220	2200	2130	158	1,32	2,78	42	1890	40,59
	2250	2500	2430	179	1,32	3,14	42	1890	45,01
	2280	2800	2730	200	1,33	3,50	42	1890	50,66
	2300	3000	2930	214	1,33	3,75	42	1890	54,12
3-трубчатый, T=105 мм									
	3019	190	120	20	1,27	0,50	66	2970	14,93
	3026	260	190	28	1,31	0,63	66	2970	15,47
	3030	300	230	33	1,33	0,70	66	2970	15,88
	3035	350	280	38	1,36	0,79	66	2970	16,36
	3037	370	300	38	1,30	0,83	66	2970	16,88
	3040	400	330	43	1,36	0,88	66	2970	16,91
	3045	450	380	48	1,36	0,97	66	2970	17,33
	3050	500	430	53	1,36	1,06	66	2970	17,86
	3055	550	480	58	1,36	1,16	66	2970	18,38
	3057	570	500	58	1,30	1,19	66	2970	18,94
	3060	600	530	63	1,36	1,25	66	2970	18,96
	3075	750	680	78	1,36	1,52	66	2970	20,33
	3090	900	830	92	1,36	1,79	66	2970	21,89
	3100	1000	930	102	1,36	1,98	66	2970	22,94
	3110	1100	1030	111	1,35	2,16	66	2970	25,77
	3120	1200	1130	120	1,35	2,34	66	2970	30,13
	3150	1500	1430	147	1,35	2,89	66	2970	39,08
	3180	1800	1730	173	1,35	3,43	66	2970	48,20
	3200	2000	1930	190	1,34	3,80	59	2655	51,66
	3220	2200	2130	207	1,34	4,16	59	2655	58,82
	3250	2500	2430	231	1,34	4,71	30	1350	65,98
	3280	2800	2730	255	1,34	5,25	30	1350	73,49
	3300	3000	2930	270	1,33	5,62	30	1350	79,55

Трубчатые радиаторы

Модель		H, мм	N, мм	Ф ΔТ 50К 75/65/20°C	Exp., п	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро
4-трубчатый, T=145 мм									
	4019	190	120	27	1,25	0,66	66	2970	16,91
	4026	260	190	36	1,30	0,84	66	2970	17,26
	4030	300	230	43	1,33	0,93	66	2970	17,57
	4035	350	280	49	1,35	1,06	66	2970	18,18
	4040	400	330	56	1,35	1,18	66	2970	18,54
	4045	450	380	62	1,35	1,30	66	2970	19,31
	4050	500	430	69	1,35	1,42	66	2970	19,89
	4055	550	480	75	1,35	1,54	66	2970	20,76
	4060	600	530	81	1,35	1,66	66	2970	21,45
	4075	750	680	100	1,35	2,03	66	2970	24,37
	4090	900	830	117	1,35	2,39	66	2970	28,10
	4100	1000	930	129	1,35	2,63	66	2970	30,36
	4110	1100	1030	141	1,35	2,88	66	2970	33,55
	4120	1200	1130	152	1,35	3,12	66	2970	37,91
	4150	1500	1430	186	1,35	3,85	54	2430	51,07
	4180	1800	1730	219	1,34	4,58	54	2430	61,38
	4200	2000	1930	241	1,34	5,06	44	1980	67,96
	4220	2200	2130	262	1,34	5,55	44	1980	76,37
	4250	2500	2430	293	1,34	6,27	30	1350	84,87
	4280	2800	2730	323	1,34	7,00	30	1350	96,03
	4300	3000	2930	343	1,34	7,49	30	1350	102,81
5-трубчатый, T=185мм									
	5018	180	110	32	1,29	0,89	66	2970	20,93
	5026	260	190	45	1,33	1,11	66	2970	21,04
	5030	300	230	53	1,36	1,23	66	2970	21,00
	5035	350	280	61	1,39	1,38	66	2970	21,42
	5040	400	330	69	1,39	1,53	66	2970	22,09
	5045	450	380	77	1,39	1,68	66	2970	23,07
	5050	500	430	85	1,39	1,83	66	2970	23,52
	5055	550	480	93	1,39	1,99	66	2970	24,37
	5060	600	530	100	1,39	2,14	66	2970	25,48
	5075	750	680	123	1,39	2,59	66	2970	29,33
	5090	900	830	144	1,39	3,05	66	2970	33,26
	5100	1000	930	158	1,38	3,35	66	2970	35,46
	5110	1100	1030	172	1,38	3,65	44	1980	41,14
	5120	1200	1130	186	1,38	3,96	44	1980	47,61
	5150	1500	1430	225	1,37	4,87	30	1350	63,94
	5180	1800	1730	263	1,37	5,78	30	1350	75,23
	5200	2000	1930	287	1,37	6,38	30	1350	83,18
	5220	2200	2130	310	1,36	6,99	30	1350	93,53
	5250	2500	2430	343	1,36	7,90	30	1350	103,79
	5280	2800	2730	374	1,35	8,81	26	1170	115,41
	5300	3000	2930	394	1,35	9,42	26	1170	123,52

Трубчатые радиаторы

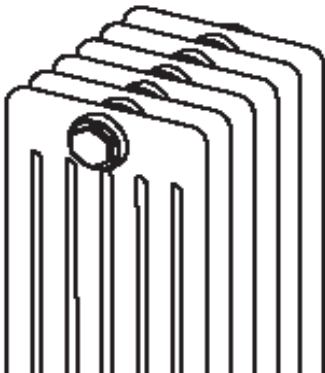Модель	H, мм	N, мм	Φ ΔТ 50К 75/65/20°С	Exp., п	Вес, кг	Кол-во секций, max	L max, мм	РЦ за элемент RAL 9016, Евро	
6-трубчатый, Т=225 мм	6018	180	110	39	1,31	1,08	66	2970	24,22
	6026	260	190	53	1,36	1,34	66	2970	24,49
	6030	300	230	62	1,39	1,49	66	2970	24,52
	6035	350	280	72	1,41	1,67	66	2970	25,22
	6040	400	330	81	1,41	1,85	66	2970	25,98
	6045	450	380	90	1,41	2,03	66	2970	26,96
	6050	500	430	99	1,41	2,21	66	2970	27,66
	6055	550	480	108	1,41	2,40	66	2970	28,96
	6060	600	530	117	1,41	2,58	66	2970	30,03
	6075	750	680	143	1,40	3,12	66	2970	34,23
	6090	900	830	168	1,40	3,67	66	2970	38,51
	6100	1000	930	185	1,40	4,03	58	2610	41,52
	6110	1100	1030	201	1,40	4,40	44	1980	48,95
	6120	1200	1130	217	1,40	4,76	44	1980	55,46
	6150	1500	1430	264	1,40	5,85	30	1350	76,17
	6180	1800	1730	309	1,39	6,95	30	1350	89,35
	6200	2000	1930	339	1,39	7,67	30	1350	98,50
	6220	2200	2130	367	1,39	8,40	22	990	110,96
	6250	2500	2430	408	1,39	9,49	22	990	123,52
	6280	2800	2730	448	1,38	10,59	22	990	138,73
	6300	3000	2930	474	1,38	11,31	22	990	147,71